


1500 P. BARRIER PRIMER

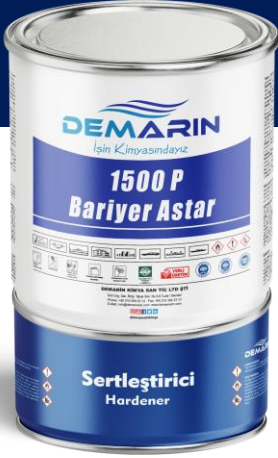

It is a two-component, epoxy-based primer with very high adhesion strength, which acts as an adhesion bridge on the surfaces it is applied to, and is also useful for changing the system in paint and putty applications thanks to the modified auxiliary resins in its structure.

AREAS OF USE

-Used as a primer on iron, steel and wooden surfaces before air-drying top coat paints.

APPLICATION INFORMATION

Surface preparation: First, the surface to be applied is cleaned of dust, dirt and oil. If there are areas that need repair, they are repaired in advance and the surface is sanded. **Application method:** 1500 P. Barrier Primer is ready to use, do not dilute. The product is mixed homogeneously with its hardener in a 3/1 ratio (3 primers / 1 hardener) in a box for 2 minutes with the help of a mixer. This product can be applied to the surface with a roller, brush or paint gun. The primer mixed with the hardener should be used within 40 minutes. The time to reach mechanical resistance is 24 hours. The air temperature where the product will be applied is +5 - 30°C.

TECHNICAL SPECIFICATIONS

- **Density:** 1.40 ± 0.02 Mixture
- **Color:** White, Gray, Black
- **Gloss:** Matt
- **Thinner:** Not thinned
- **Consumption:** 8-10 m²/kg
- **Solvent:** Thinner
- **Gun Nozzle Diameter:** 1.2 – 1.4 mm

PACKAGING & STORAGE

- **Packaging:** 1, 4 and 20 kg metal cans
- **Storage Temperature:** +5 - 30 °C
- **Shelf Life:** If stored in original, unopened and undamaged packaging, the primer is suitable for 24 months and the hardener is suitable for 12 months from the date of production.
- **Storage Conditions:** Store in a dry and cool environment with the packaging lids tightly closed.



Attention

The applied surface must be protected from water, moisture and mechanical impacts for at least 24 hours during and after application.



Customizable
with color chart



Pedestrian traffic

Material	Concrete	Marble	Wood	Tile	Metal
Waiting Time Between Floors	2 hours	2 hours	2 hours	2 hours	2 hours
Dry to the Touch	4 hours	4 hours	4 hours	4 hours	4 hours
Recommended Application	Roller, Brush	Roller, Brush	Roller, Brush	Roller, Brush	Roller, Airless
Complete Drying	24 hours	24 hours	24 hours	24 hours	24 hours